

## KEN IQ5

# Intelligent Quality

- The Future of Efficient Disinfection

- **Easy to use**
- **Easy to trust**
- **Easy to service**
- **Easy to choose**

KEN A/S has developed a new range of washer disinfectors that will facilitate the usage, liability and service of washer disinfectors for the CSSDs, utility rooms in hospitals and private clinics.

The IQ series is a modular built range that meets all relevant standards such as ISO 15883, UL to name a few.

The elegant design provides a smooth surface in tempered glass that is easy to clean. The IQ5 has downward sliding doors that allows for manual loading, or the use of a unique automatic loading that provides high flexibility and uses very little space.

The IQ is easy to operate by touch panel with swipe function, showing all relevant information of the program needed by the operators.

IQ5, the first washer in the series, has the lowest energy and water consumption in the market, that keep operating costs at a minimum and contribute to a clean environment.

IQ5 comes with a flexible 5 or 6 level trolley and can hold up to 12 DIN baskets.

All data from the IQ5 are fully exchangeable with common computer systems.



## Advantages:

- Intuitive smart display PCTP
- Very low water consumption
- RFID technology
- Maintenance free sliding doors
- Robotic loading / unloading
- Service access from the front

### Hygiene safety

- EN 62366 tested
- EN ISO 15883-1-2-5
- Glass surfaces easy to clean


### Validation of all processes

- Open programs structure
- Full process validation
- Exchange of data
- Printer

### Environment

- Low energy costs
- Low noise level
- Low chemical usage

Power connection	3x400 V 50 Hz e+z or multiple choices
Connected load/pre-fuse	13 kW/20A
Chamber volume	240 L
Approx. water intake per step	11-12 L
Water connection cold /tap water	1 pcs. 3/4", 5-30°, 0-30°dH
Water connection soft	1 pcs. 3/4", 5-70°, 0-3°dH
Water connection demineralised/RO	1 pcs. 3/4", 5-70°C - option
Ventilation	ø100, 180 m3 per hour
Steam pressure	150-400 kPa - option
Dimensions H x W x D	2000 x 662 x 711 mm
Standard Washing Program	35-40 min.
Rapid program	Optional
Capacity per batch	10/12 DIN
Glass cover	Tempered glass
Doors	Downward sliding doors
Programs available	10 standard
Additional programs	30 additional programs

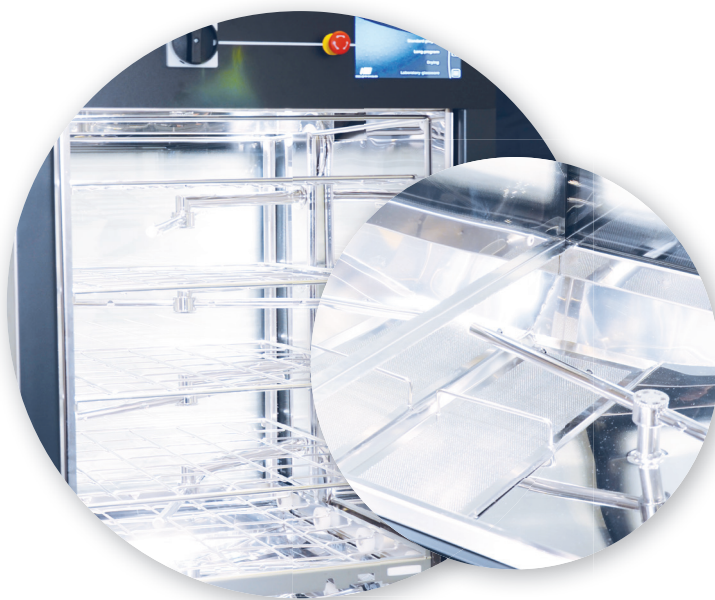

## Contact a KEN partner

KEN will gladly help you find the right solution.

Tel.: +45 62 63 10 91  
E-mail: ken@ken.dk  
Web: www.ken.dk



**We make a difference - locally and globally**

