


KEN IWD 2211

Washer-disinfector for hospital wards

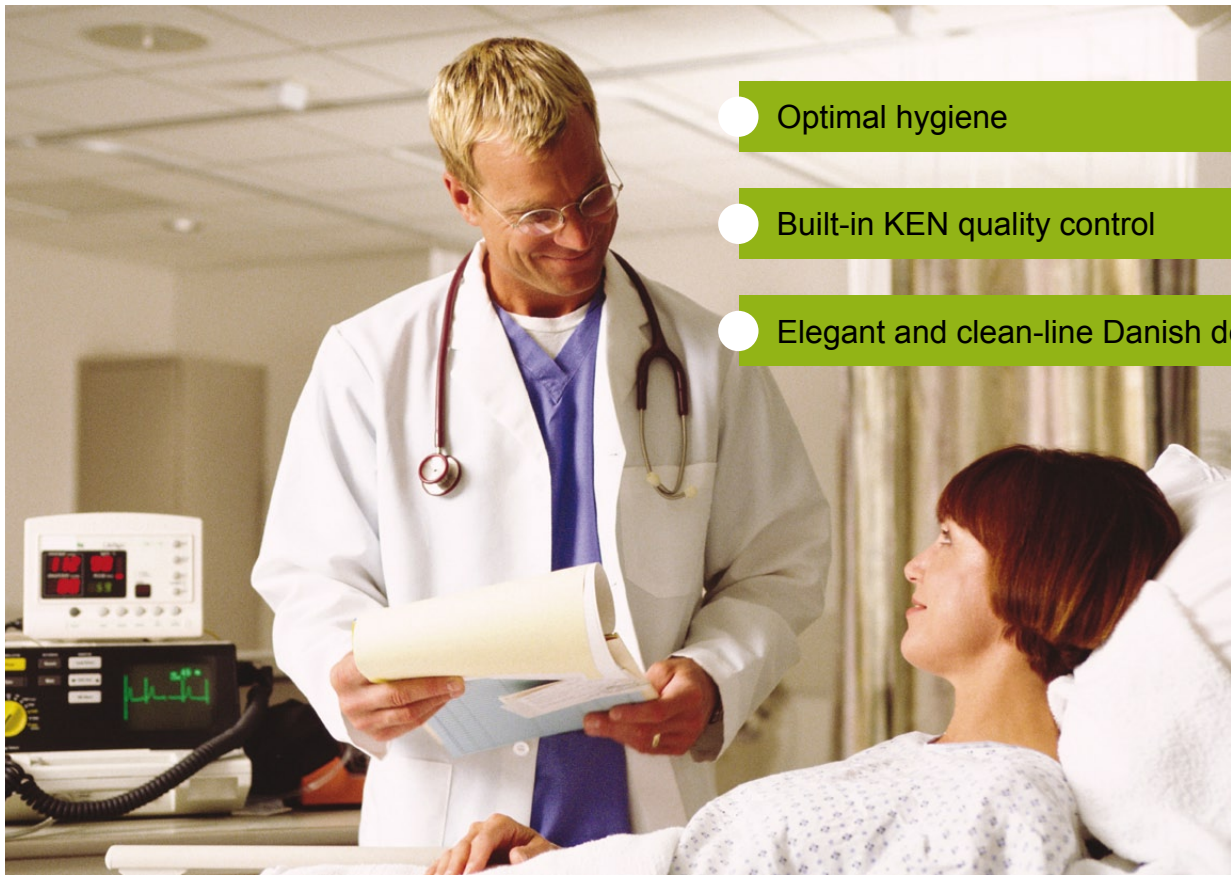

- Optimal hygiene
- Built-in KEN quality control
- Elegant and clean-line Danish design

For more information consult – www.ken.dk



Versatile, flexible solution

KEN IWD 2211 is a new generation of washer-disinfectors, available both as pass-through machines and with one door. The pass-through model ensures effective separation of the unclean and clean side, thereby optimizing the hygiene level and reducing the risk of hospital infections.

The machine has an elegant, clean-line Danish design. KEN IWD 2211 can wash at up to 2 levels and is mainly recommended for wards with wash basins, flower vases and the like.



Advantages:


- User-friendly control panel ensures correct operation
- Programmes etc. shown in the display in plain language
- Possibility for individual programme choice. 4 programmes as standard
- Process Indication Bar shows how far the programme has come
- Double monitoring of temperature (EN/ISO 15883)
- Possible selection of intelligent, maintenance-free drying module
- Possible connection of up to 4 types of chemicals - 2 as standard
- Able to have printer connected for optimum process documentation
- Lockable lower compartment for keeping chemicals - up to 4 x 5 l containers



Service

The machine has built-in KEN Quality control for optimum reliability. It demands a quality assurance check every 24 hours as well as servicing after 2,500 washes. The construction is service-friendly, with easy access to all components.

All KEN machines conform to present EU Directives, and all hospital machines have been constructed on the basis of EN ISO 15883, including, for example, the testing of its cleaning capacity according to SIS-TR 3:2001 (formerly SPRI).

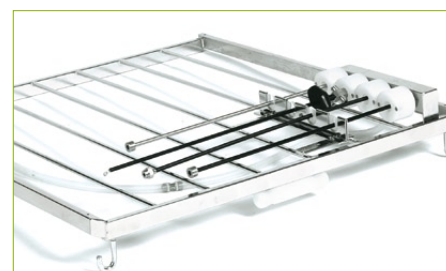

Accessories

Above are examples of accessories/equipment for this machine. Look for equipment with the aid of the equipment selector at www.ken.dk, or contact KEN for information about further possible equipment, including customized special solutions.

Contact a KEN specialist

KEN will gladly help you find the right solution. Consult www.ken.dk to find your KEN dealer.

Tlf.: +45 62 63 10 91
 e-mail: ken@ken.dk
 Internet: www.ken.dk

Specifications

Power connection	3 x 400 V,N,J, 50Hz (multiple choices as option)
Connected load/pre-fuse	6,5kW/10A
Water connection	Cold untreated water: 1 pcs., 3/4" RG, 5-30°C, 0-30°dH
Water connection	Hot soft water: 1 pcs., 3/4" RG, 30-70°C, 0-3°dH
Water connection	Demin. water: (Extra) 1 pcs., 3/4" RG 5-70°C
Water pressure	200-800 kPa
Outlet valve	Ø 50
Water amount (approx.) per. intake	11 l
Ventilation (if supplied with drying module)	Ø 70, 100 m³/hour
Pump capacity	270 l/min.
Free depth 2 doors	550 mm
Free depth 1 door	560 mm
Free width without central level	510 mm
Noise level	approx. 59-64 dBa (sound pressure)
Sealing class	IP 21 (not scavenger-proof)



We make a difference – both locally and globally